


# MICRO BLADE & BEAM SOCKET & HEADER

(0.50 mm) .0197" PITCH • SS5/ST5 SERIES

PAM 4  
56  
Gbps

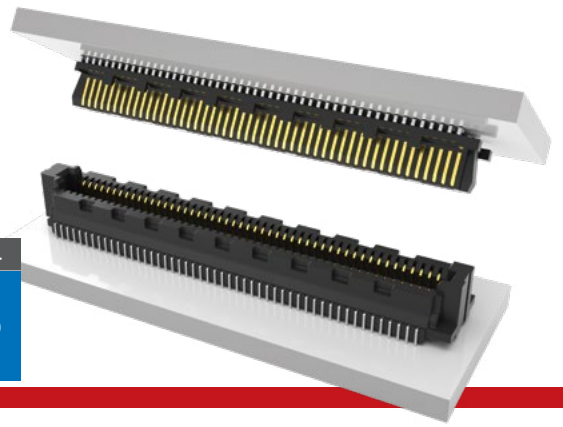

**SS5**  
Mates:  
ST5

**ST5**  
Mates:  
SS5

## SPECIFICATIONS

**Insulator Material:**  
Black LCP  
**Contact Material:**  
Phosphor Bronze  
**Plating:**  
Au or Sn over  
50 μ" (1.27 μm) Ni  
**Operating Temp Range:**  
-55 °C to +125 °C  
**Current Rating:**  
1.5 A per pin  
(2 pins powered)

## PROCESSING

**Lead-Free Solderable:**  
Yes  
**SMT Lead Coplanarity:**  
(0.10 mm) .004" max

SS5	NO. OF POSITIONS	LEAD STYLE	PLATING OPTION	D	K	"X"R
-----	------------------	------------	----------------	---	---	------

-10, -15, -20,  
-30, -40, -50,  
-60, -70, -80  
(Per Row)

-3.00  
= 3.00 mm  
-3.50  
= 3.50 mm

-L  
= 10 μ"  
(0.25 μm)  
Gold on contact,  
Matte Tin on tail



(Required in callout)

-K  
= (3.50 mm)  
.138" DIA  
Polyimide  
Film  
Pick &  
Place Pad

(Required in callout)

-TR  
= Tape & Reel

-FR  
= Full Reel  
Tape & Reel  
(must order max.  
quantity per reel;  
contact Samtec for  
quantity breaks)

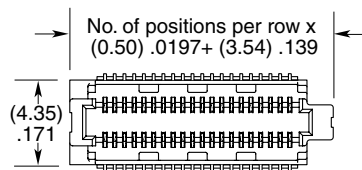

LEAD STYLE	A	B
-3.00	(2.85) .112	(3.50) .138
-3.50	(3.35) .132	(4.00) .157

## MATED HEIGHT \*

ST5 LEAD STYLE	SS5 LEAD STYLE	
-1.00	(4.00 mm) .157"	(4.50 mm) .177"
-1.50	(4.50 mm) .177"	(5.00 mm) .197"

\*Processing conditions will affect mated height.

ST5	NO. OF POSITIONS	LEAD STYLE	PLATING OPTION	D	P	"X"R
-----	------------------	------------	----------------	---	---	------

-10, -15, -20,  
-30, -40, -50,  
-60, -70, -80  
(Per Row)

-1.00  
= 1.00 mm  
-1.50  
= 1.50 mm

-L  
= 10 μ"  
(0.25 μm)  
Gold on contact,  
Matte Tin on tail



(Required in callout)

-P  
= Pick &  
Place Pad

(Required in callout)

-TR  
= Tape & Reel

-FR  
= Full Reel  
Tape & Reel  
(must order max.  
quantity per reel;  
contact Samtec for  
quantity breaks)

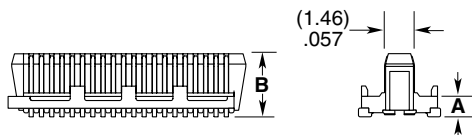

LEAD STYLE	A	B
-1.00	(1.00) .039	(3.08) .121
-1.50	(1.50) .059	(3.58) .141

## ALSO AVAILABLE

Other lead styles  
(MOQ Required)

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.